


660

QUARTER TURN – EASY FIXING



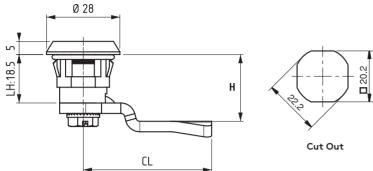


- Easy assembly by clips
- Mounting nut not required.
- Specially designed internal spring provides 1.5 mm torsion
- Can be used for panel thickness 0.8 to 2 mm
- Please contact Essentra
 Components for special colours

MATERIAL

HOUSING: PA6 GFR 30 DRIVER: Zamak DIN-EN

1774-ZnAl4Cu1 or PA6 GFR 30


CAM: Steel or Plastic GASKET: Rubber



Door Thickness	Version
for 0.8 -1.2 mm panels	1
for 1.2 -1.5 mm panels	2
for 1.5 - 2 mm panels	3 *

^{*} in this version IP 65 is not available





MATERIAL	М	
Zamak	1	
Plastic	2	

FINISH	F
Chrome	1
Black coated	2
No finish	0

