


HVAC LOCK

112



- Ergonomic and stylish design
- Quick fixing
- Secure locking
- Adjustable grip length
- Suitable for outward swing doors

MATERIAL

BODY: Polyamide DIN-EN ISO 1043-1 PA6 GFR 30
HANDLE: PA6 GFR 30
CAM: Steel - PA6 GFR 30
SEAL: Polyurethane

! This product can be produced as anti-bacterial with PA6 GFR 30% + 6% content. The raw material used has been tested in the DIN EN ISO 846 standard.







No cylinder


Driver




Padlock application

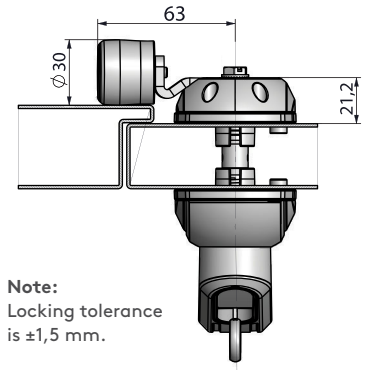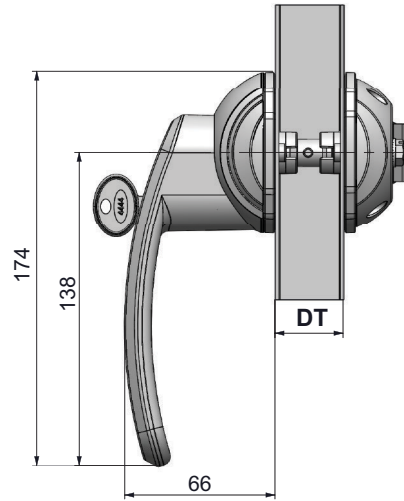

Note:
Locking tolerance is $\pm 1,5$ mm.



Left hand
Cut out



Right hand
Cut out

For different door thicknesses, please contact our sales team



- 1: Handle
 2: Shaft unit
 3: Roller cam
 4: Safety cam (Optional - 112A3CH01)
 5: Lever handle (Optional - 112A101)
 6: Safety interior handle (Optional - 112A2)

DT
30
40
50
60
70
80

CYLINDER TYPE	DD
No Cylinder	00
Keyed alike (Stainless steel dust cap)	03
Keyed differ (Stainless steel dust cap)	32
Euro key (5333)	05

DRIVER TYPE	DD
8 mm Square	28
10 mm Square	20
7 mm Triangular	37
8 mm Hexagon	68

- For cams please check pages: 122
- For accessories pages 123 - 124
- For keys please check pages: 124

Group Code	Version	Door thickness	Cylinder Driver	Cam	For only padlock*
112	1	DT	DD	CC	

*: add "1" for padlock application