



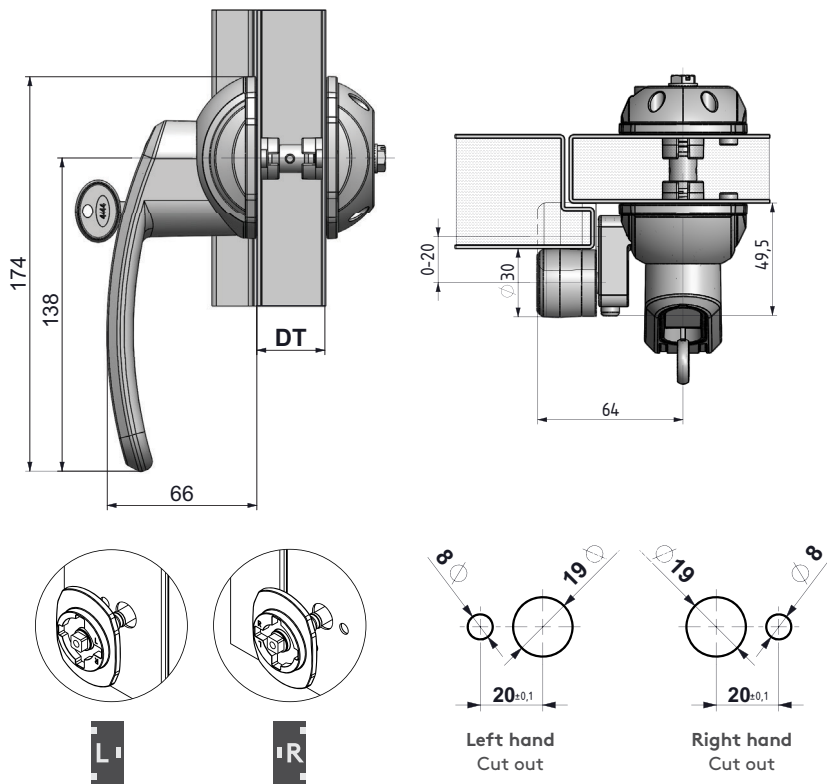

For different door thicknesses, please contact our sales team

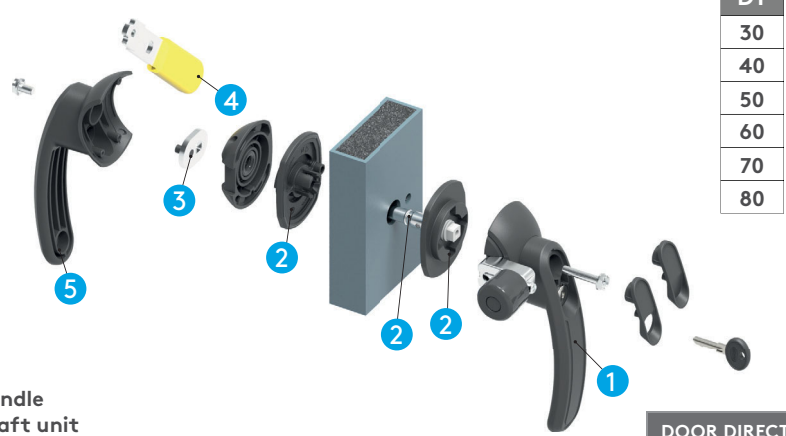

DT
30
40
50
60
70
80

DOOR DIRECTION	
Right hand	001
Left hand	002

- 1: Handle
- 2: Shaft unit
- 3: Fixing device
- 4: Lever handle (Optional - 112A101)
- 5: Safety interior handle (Optional - 112A2)

CYLINDER TYPE	DD
No Cylinder	00
Keyed alike (Stainless steel dust cap)	03
Keyed differ (Stainless steel dust cap)	32
Euro key (5333)	05

DRIVER TYPE	DD
8 mm Square	28
10 mm Square	20
7 mm Triangular	37
8 mm Hexagon	68

Group Code	Version	Door thickness	Cylinder Driver	Cam	For only padlock*	Door Direction
112	2	DT	DD	CC		


*: add "1" for padlock application

112

NEW

RoHS

IP 65



HVAC LOCK



- Ergonomic and stylish design
- Quick fixing
- Secure locking
- Adjustable grip length
- Suitable for inward swing doors

MATERIAL

BODY: Polyamide DIN-EN ISO 1043-1 PA6 GFR 30
HANDLE: PA6 GFR 30
CAM: Steel - PA6 GFR 30
SEAL: Polyurethane



No cylinder



Driver



Padlock application

- For cams please check pages: 122
- For accessories pages 123 - 124
- For keys please check pages: 124