






NEW


RoHS



IP 65



Installation:

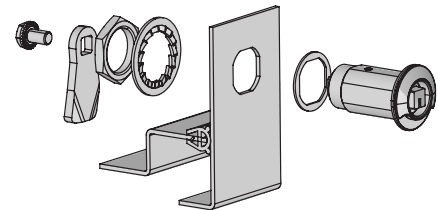

Features


- Provides open-closed information thanks to specially designed housing and inner housing
- Used for cabinets that require better sealing under vibrating conditions
- Provides 5 mm of compression
- Provides noise isolation
- Different drivers/cams available
- Standard cams without stopper required for these locks
- Working Temperature Range: -50/+80 C
- M22 Nut : should be fixed with 20 Nm
- M10 Nut: should be fixed with 10 Nm
- Threadlocker is applied to the nut threads to get extra fastness against vibration and shock
- Max load capacity: 562 N

MATERIAL

HOUSING : Stainless Steel (AISI 304)
DRIVER : Stainless Steel (AISI 304)
CAM : Stainless Steel (AISI 304)
NUT : Stainless Steel (AISI 304)

Tested

- The lock has been tested according to the DIN EN 61373 Category 1-B for vibration and shock.



Open indicator



90°



180°

The first 90° of key rotation turns the cam to locking position

Further key rotation 180° applies 5 mm compression

Choose

MATERIAL	M	FINISH	F	DOOR DIRECTION	
Stainless Steel	4	No finish	0	Right hand	001
				Left hand	002

DRIVERS					
3 mm Double bit	5 mm Double bit	8 mm Square	7 mm Triangular	8 mm Triangular	2X4 mm Slot
DD 13	DD 15	DD 28	DD 37	DD 38	DD 42

Full product code

Group Code	Version	Material	Finish	Driver	Cam	Door Direction
2040	1	4	0	DD	CC	


Go to the page



For cams please check pages: 174



For keys please check pages: 189 - 191

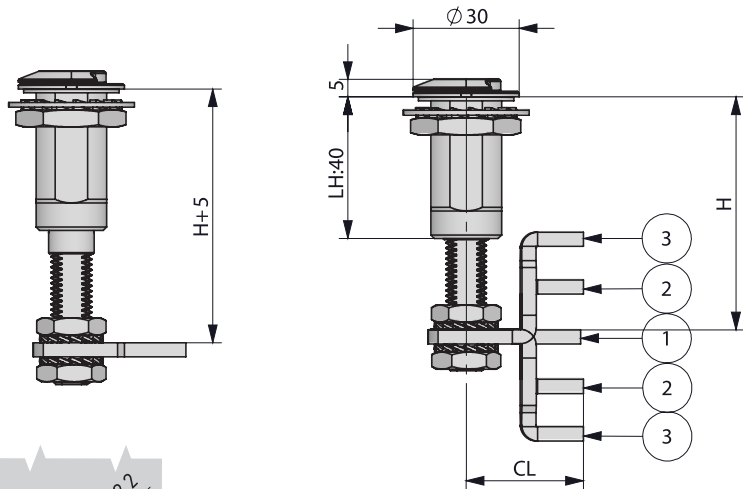



NEW

RoHS

IP 65



Installation:

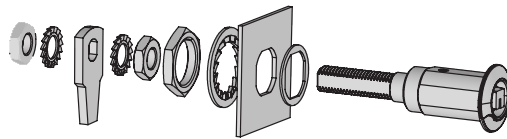Standard
Cut OutOpen
indicator

90°



180°

The first 90° of key rotation turns the cam
to locking positionFurther key rotation 180° applies
5 mm compression

Features

- Provides open-closed information thanks to specially designed housing and inner housing
- Used for cabinets that require better sealing under vibrating conditions
- Provides 5 mm of compression
- Provides noise isolation
- Different drivers/cams available
- Standard cams without stopper required for these locks
- Working Temperature Range: -50/+80 C
- M22 Nut : should be fixed with 20 Nm
- M10 Nut: should be fixed with 10 Nm
- Threadlocker is applied to the nut threads to get extra fastness against vibration and shock
- Max load capacity: 562 N

MATERIAL

HOUSING : Stainless Steel (AISI 304)
 DRIVER : Stainless Steel (AISI 304)
 CAM : Stainless Steel (AISI 304)
 NUT : Stainless Steel (AISI 304)

Tested

- The lock has been tested according to the DIN EN 61373 Category 1-B for vibration and shock.

Choose

MATERIAL	M	FINISH	F	DOOR DIRECTION
Stainless Steel	4	No finish	0	Right hand 001 Left hand 002

DRIVERS					
3 mm Double bit	5 mm Double bit	8 mm Square	7 mm Triangular	8 mm Triangular	2X4 mm Slot
DD 13	DD 15	DD 28	DD 37	DD 38	DD 42

CAM	STOCK CODE	CC	CH	CL	POSITION	H GRIP MIN	H GRIP MAX
1	30403565Y	01	0	33	Flat	28	45
2	30403566Y	02	14	33	Up Down	14 42	31 59
3	30403567Y	03	27,5	33	Up Down	0,5 55,5	17,5 72,5

Full product code

Group Code	Version	Material	Finish	Driver	Cam	Door Direction
2040	2	4	0	DD	CC	

Go to the page



For keys please check pages: 189 - 191